

## Pressure Relief Valve

### Model 43T


The BERMAD model 43T is an elastomeric, pilot operated, pressure-relief valve. Designed specifically for advanced fire protection systems and the latest industry standards.

The 43T prevents damage from over-pressure in piping systems, maintaining a preset upstream pressure limit regardless of pressure peaks and fluctuating conditions.

Due to exceptional reliability and low head loss, it is ideal for relief of fire pump discharge. The 43T dependably relieves excess system pressure to sump or atmosphere, meeting all NFPA, UL, and FM requirements for fire pump service.

The 43T is also well-suited for maintaining foam concentrate discharge pressure for a balanced proportioning system.

As an option the 43T can be fitted with a valve position indicator that can include a limit switch suitable for Fire & Gas monitoring systems.

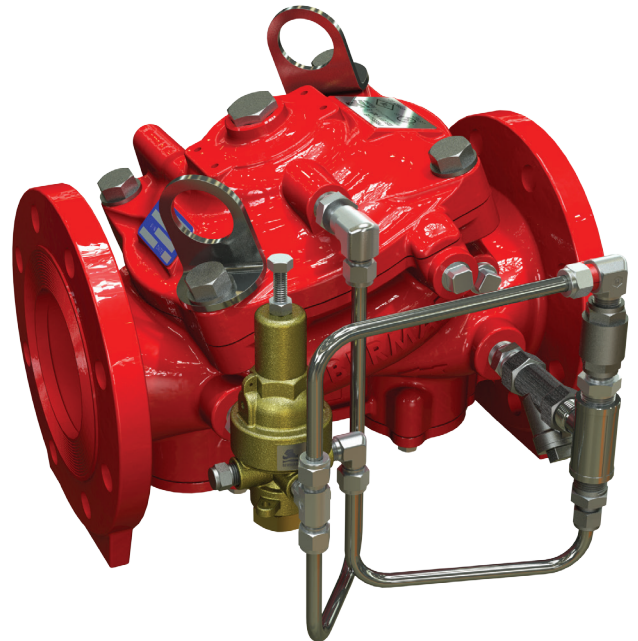

### Benefits and Features

- **Safety and reliability**
  - Time-proven, simple, fail-safe actuation
  - Single piece, rugged, elastomeric diaphragm seal – VRSD technology
  - Obstacle-free, uninterrupted flow path
  - High discharge capacity
  - No mechanical moving parts
- **High performance**
  - Fast, smooth response to pressure fluctuations
  - High flow capacity
  - Approved for PN 25bar/365 psi
  - Straight-through-flow Y-type body
- **Specifically-designed for fire protection**
  - Face-to-face length standardized to ISO 5752, EN 558-1
  - Meets the requirements of the industry standards
- **Quick and easy maintenance**
  - In-line serviceable
  - Quick cover removal without detaching control trim

### Typical Applications

- Fire pump pressure relief
- Foam concentrate recirculation
- Centralized thermal pressure relief
- Zonal safety relief

### Approvals



UL-Listed  
Fire Pump Relief Valves



FM Approved  
Water Pressure Relief Valves



Det Norske Veritas  
Type Approval



ABS  
American Bureau of Shipping  
Type Approval




Lloyd's Register  
Type Approval

### Additional Features

- Sea water compatibility
- Large control filter
- Stainless steel seat ring
- Position limit switches

# BERMAD Fire Protection





Model FP 400Y - 43T

400Y Series



## Operation

(for Illustration Only)

8" valves and larger

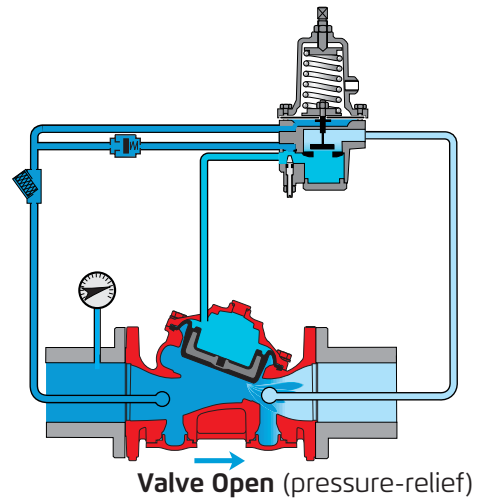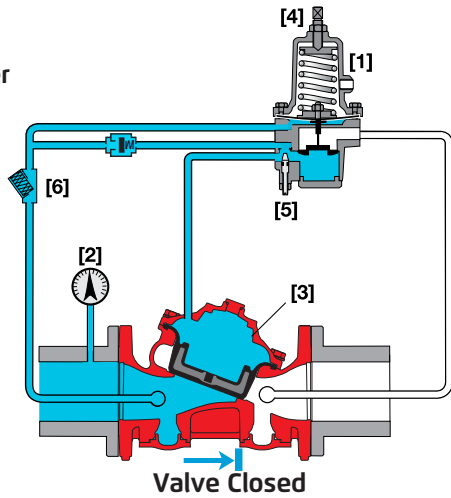


6" valves and smaller

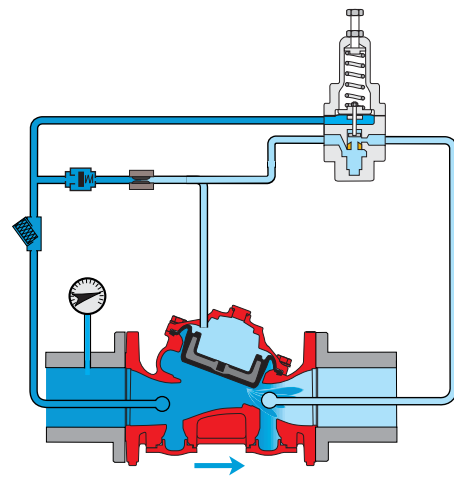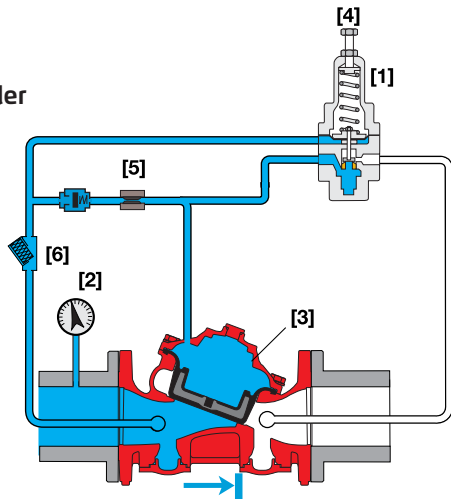

The BERMAD Model 43T pressure control valve remains closed as long as system pressure remains lower than the preset value. The preset pressure can be adjusted by way of the pilot adjusting screw [4]. When the pilot valve [1] senses upstream pressure [2] higher than the preset value it opens releasing water pressure from the main valve control chamber [3] thus causing the 43T to open and thereby relieving excess system pressure to a reservoir or sump, preventing system overpressure.

When inlet pressure falls, the pilot valve throttles, enabling pressure to accumulate in the control chamber. This causes the main valve to close further and sustain upstream pressure. An integral restrictor [5] controls the valve's closing speed. For valves 8" and larger, an adjustable needle valve is provided.

## System P&ID

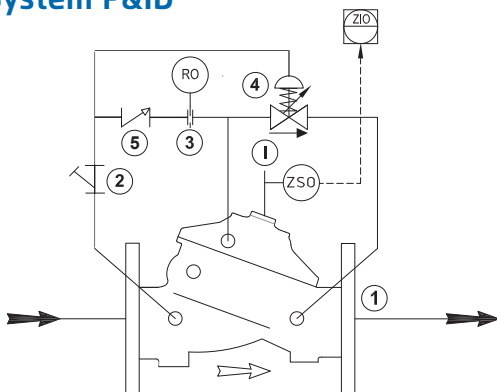


### Components

- 1 BERMAD 400Y Water Control Valve
- 2 Y Strainer
- 3 Restriction Orifice
- 4 Pressure Relief Pilot Valve
- 5 Check Valve

### Optional System Items

- ZS Limit Switch Assembly



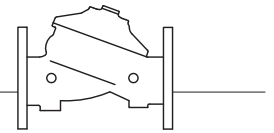


## System Installation

A typical installation of the BERMAD model 43T features a pilot valve for the automatic and accurate maintenance of a constant preset maximum upstream pressure, regardless of fluctuating demand. The fast opening 43T reliably relieves excess system pressure to sump or atmosphere, meeting NFPA, UL, and FM requirements for fire pump service. A unique actuator design ensures quick and smooth valve action.

### Pressure reduction systems

- The fast response of the 43T preempts pressure reducing valve reaction preventing overpressure peak damage to sensitive equipment
- Backup/redundancy for reducing valve to ensure pressure zone rating at all times
- Thermal relief: Relieves overpressure caused by changes in temperature.

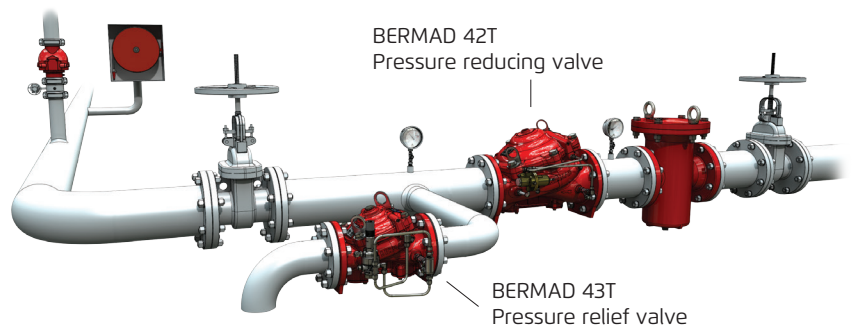


### Relief Valve Sizing Table, for pressure reducing systems

42T Pressure Reducing Valve: inch (mm)	1.5"(40)	2"(50)	3"(80)	4"(100)	6"(150)	8"(200)	10"(250)	12"(300)	14"(350)	16"(400)
Recommended Relief Valve: inch (mm)	¾"(20)	¾"(20)	1½"(40)	2"(50)	3"(80)	3"(80)	4"(100)	4"(100)	4"(100)	4"(100)

### Fire pump relief

- Relieves overpressure spikes on the starting sequence or on cessation of fire water demand
- Prevents surge damage on pump shut down or sudden changes in flow

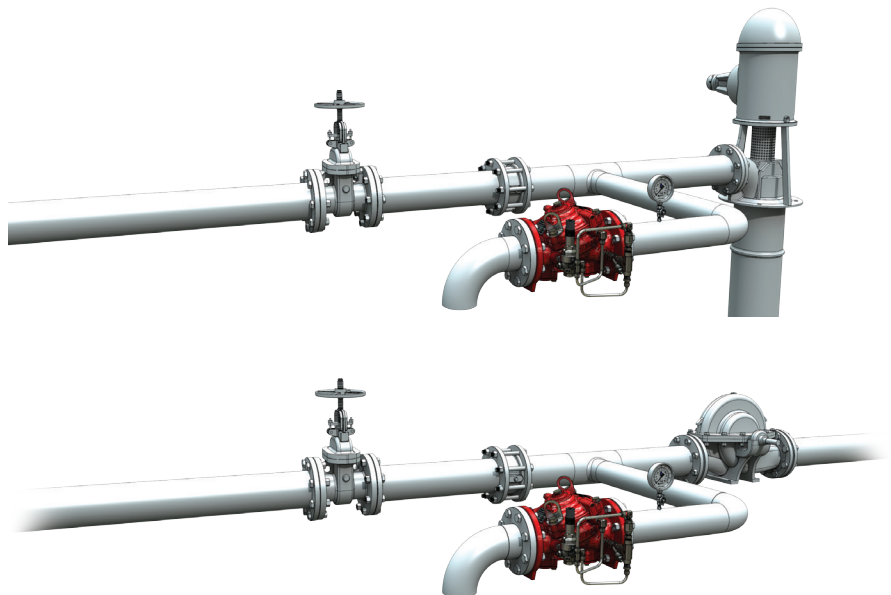

(for Illustration Only)

## Engineering Specifications


The pressure relief valve shall maintain a constant, preset, maximum upstream pressure regardless of fluctuating demand, it shall be a UL-listed and FM-approved, 25 bar/365 psi rated, line pressure driven and pilot operated, pressure control valve.

The valve shall be of the elastomeric-type with a straight-through Y-type-body design. It shall have an unobstructed flow path, with no stem guide or supporting ribs.

Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disc.

The diaphragm assembly shall be the only moving part.

Removing the valve cover for inspection and maintenance shall be inline and shall not require removal of the control trim. The control trim shall be supplied pre-assembled and hydraulically tested by a factory certified to ISO 9000 and 9001 standards.



## Technical Data

### Available Sizes (inch)

- Flanged - 1½, 2, 3, 4, 6, 8, 10, 12, 14 & 16"
- Grooved - 1½, 2, 3, 4, 6 & 8"
- Threaded - 1½ & 2"

### Pressure Rating and Limitations

- ANSI#150 - 16 bar/235 psi
- ANSI#300 - 1½" to 10" 25 bar/365 psi  
12" to 16" 20 bar/300 psi
- Grooved - 25 bar/365 psi
- Threaded - 25 bar/365 psi

Maximum Differential for pump-relief valve or PSV:  
25 bar/350 psi


Maximum Differential for PCV duty:

12 bar/175 psi

Pump relief sizing shall be in accordance with the NFPA 20 guidelines

### Temperature Rating


- 60°C/140°F with NR elastomers (standard)
- 90°C/194°F with EPDM elastomers

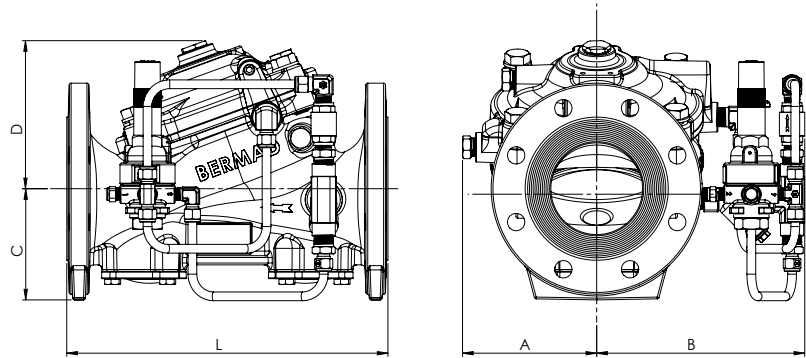

Valve Size	1½" DN40	2" DN50	3" DN80	4" DN100	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400
<sup>(1)</sup> L' ANSI #150 mm (in.)	230(9.06)	230(9.06)	310(12.21)	350(13.79)	480(18.91)	600(23.64)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
L² ANSI #300 mm (in.)	230(9.06)	235(9.25)	326(12.84)	368(14.50)	506(19.94)	626(24.66)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
A mm (in.)	77.5(3)	77.5(3)	100(3.94)	115(4.53)	140(5.51)	172(6.77)	204(8)	242(9.53)	242(9.53)	242(9.53)
B mm (in.)	155(6.10)	155(6.10)	251(9.88)	266(10.47)	372(14.65)	490(19.29)	490(19.29)	656(25.83)	656(25.83)	656(25.83)
C mm (in.)	64(2.52)	77(3.03)	106(4.17)	121(4.76)	140(5.51)	172(6.77)	204(8.03)	247(9.72)	272(10.71)	316(12.44)
D mm (in.)	120(4.69)	120(4.69)	146(5.75)	158(6.22)	228(9)	295(11.65)	296(11.65)	441(17.36)	441(17.36)	415(16.3)
Kv m³/h (Cv gpm)	68(79)	80(92)	190(219)	345(398)	790(912)	1160(1340)	1355(1565)	2370(2737)	2850(3292)	3254(3758)
<sup>(2)</sup> Leq m (ft)	2(7)	5(16)	7(23)	9(30)	15(49)	27(89)	62(203)	52(171)	59(194)	88(289)
Kg(lb) flanged#150/ISO16	11.5(25.3)	12.8(28.2)	27.5(60.5)	37.5(82.5)	81(178)	146(321)	176(387)	321(706)	354(779)	400(880)

- Notes: <sup>(1)</sup> L1 Dimensions are for grooved, threaded and raised face flanged valves  
<sup>(2)</sup> Leq (Equivalent Pipe Length) refers to a fully opened valve and turbulent flow in new steel pipe schedule 40, values given for general consideration only  
<sup>(3)</sup> Dimensions for the trim envelope may vary with specific component positioning  
<sup>(4)</sup> Kv/Cv values given are for a fully opened valve

## Valve Code Designations

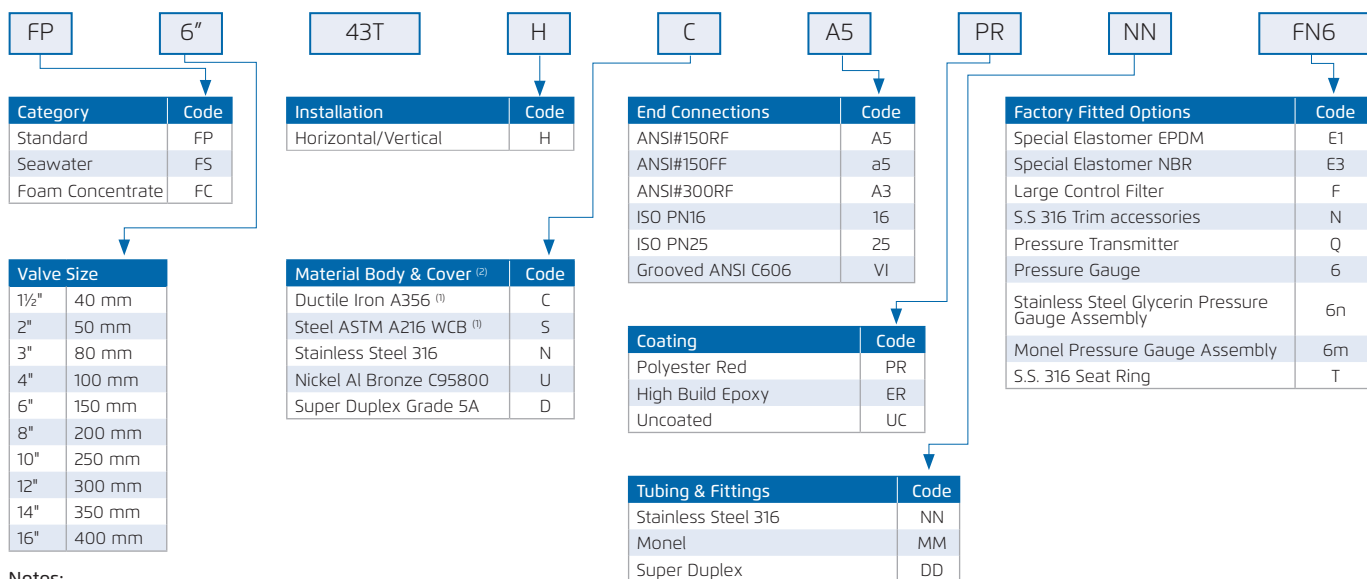

- Notes: <sup>(1)</sup> internally and externally coated  
<sup>(2)</sup> Other materials available see engineering data

